


Magneti Marelli Dinoplex AEC103A Components and PCB Diagram


V 1.0 11/2012 info@dinoplex.org, copyright www.dinoplex.org

AEC103A Connector
Front View



Tyco Fastin-Faston Connector

1. +12V from ignition key to 1R on PCB
2. to ignition coil terminal 'K' from 2B on PCB
3. 'D' from distributor points to 3Z on PCB
4. to tachometer internally wired to 3.

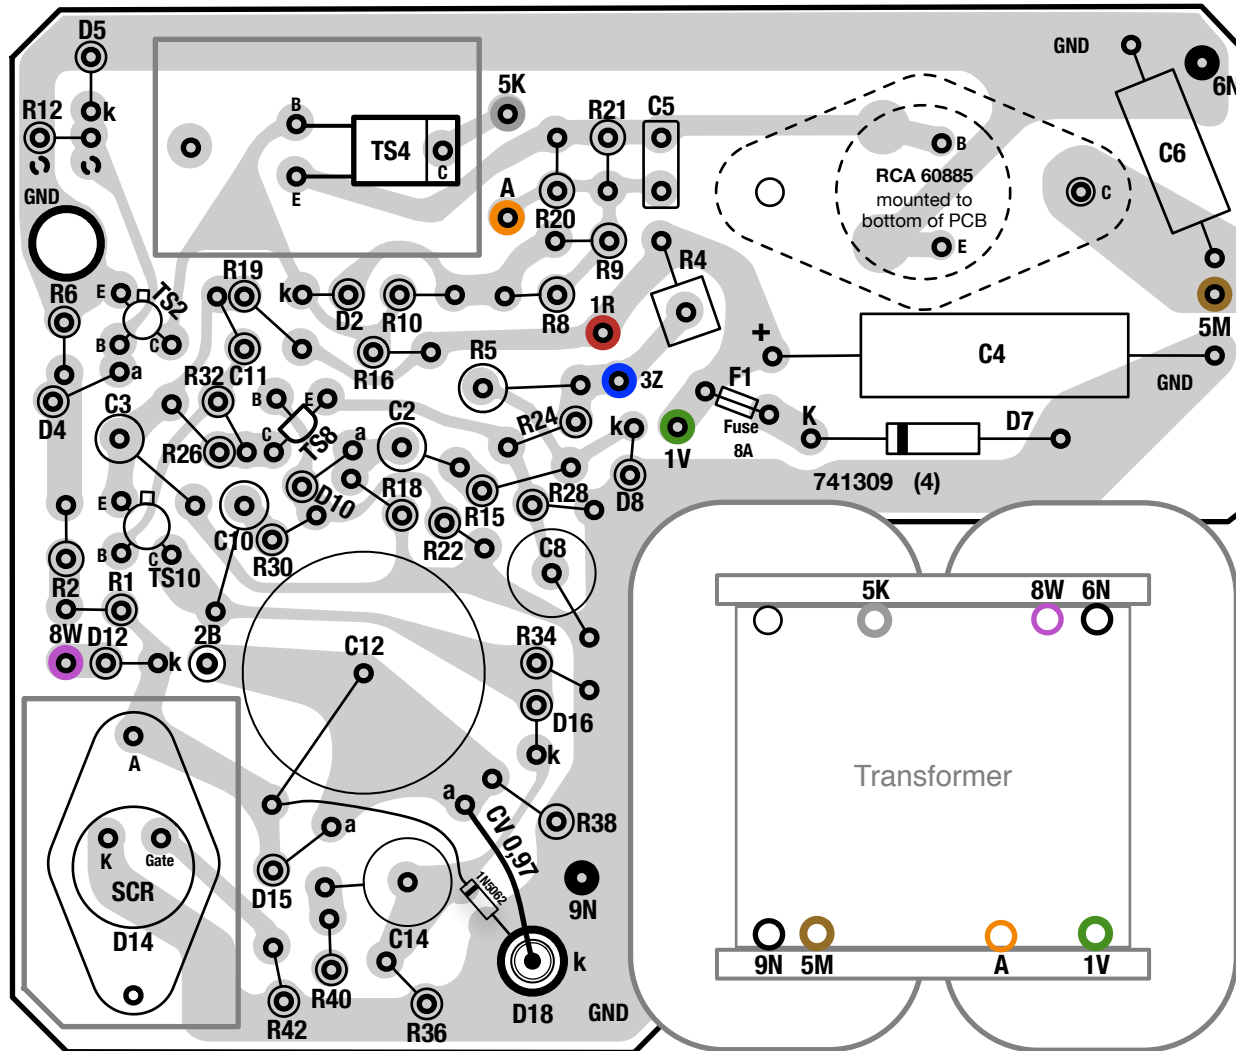

Components

R1	190K	1%	C2	100nf
R2	220K	1%	C3	1uF
R4	82	5%	C4	200uF
R5	330	5%	C5	3,2nf
R6	18K	5%	C6	0,22uf/250
R8	680	5%	C8	0,68uf
R9	1000	5%	C10	47nf
R10	22K	5%	C11	22nf
R12	8200	5%	C12	1uF/600
R15	1000	5%	C14	1uF
R16	18K	5%	D2	1n4003
R18	5600	5%	D4	1n4001
R19	475	5%	D5	1N4148
R20	3300	5%	D7	1N5408
R21	5600	5%	D8	Zener 5.1
R22	39K	5%	D10	1N4148
R24	12K	5%	D12	1N5062
R26	3800	5%	D14	Tag 6 600
R28	2800	5%	D15	1N5627
R30	1500	5%	D16	1N4001
R32	1550	5%	D18	M5 Diode
R34	180	5%	D18	1N5062
R36	2200	5%	F1	Fuse 8A
R38	28K	5%		
R40	47	5%		
R42	470	5%		
TS2	NPN, 400 hFE, TO-18			
TS4	NPN, RCA 60886, TO-220			
TS8	NPN, 54 hFE, TO-92			
TS10	PNP, 160 hFE, TO-39			
TO-3	NPN, RCA 60885			